


EXTRUDER



The Spancrete Extruder is designed to produce a variety of hollowcore slab cross sections and thicknesses. It can be run automatically, and offers a platform for easy passage over the slab and access to the hopper. The Extruder can be adjusted remotely and is also set up for 24-hour remote diagnostic functionality. The Extruder can be easily converted to different product thicknesses in less than 30 minutes.



EXTRUDER (EX120)

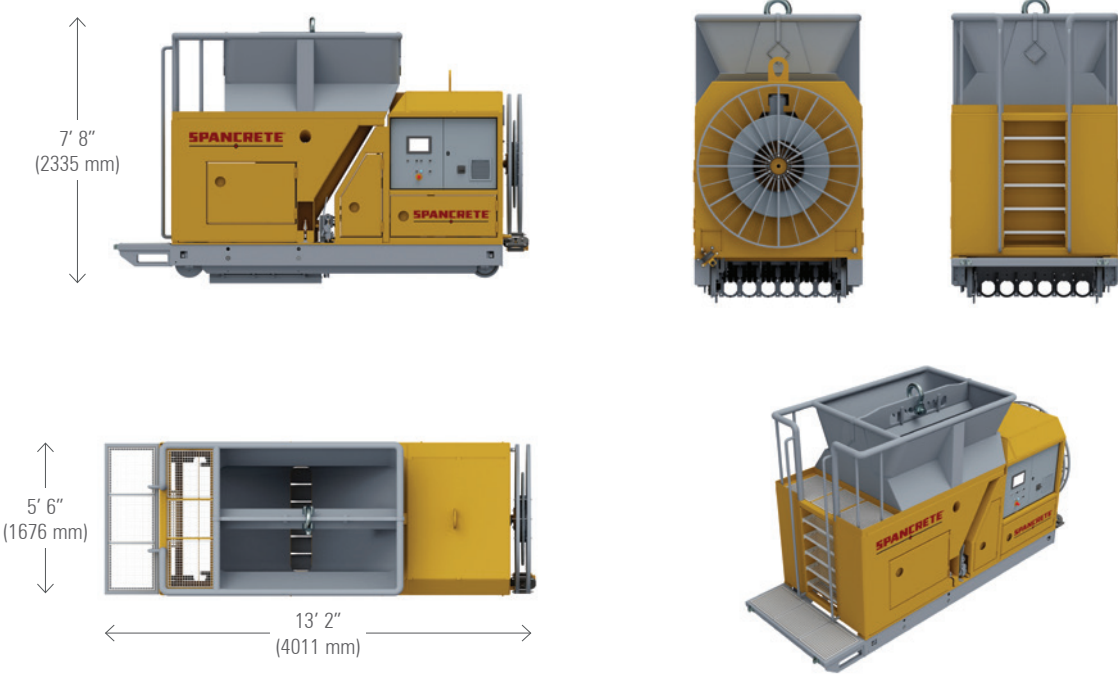

TECHNICAL DETAILS

Dimensions (LxWxH)	13.17 ft (4.01 m) x 5.5 ft (1.68 m) x 7.67 ft (2.34 m)
Weight	Loaded: 24,000 lb (10,900 kg) Empty: 16,300 lb (7,400 kg)
Power Supply	3P + PE 400 V 50/60 Hz, main fuses. Max 125 amps
Energy Consumption	Operational Load Performance: 54.2 kW (85 amps) Peak Load/Performance: 95.8 kW (155 amps)
Hopper Capacity	2.0 yd ³ (1.5 m ³)
Speed	3.3 – 7.2 ft/min (1.0 – 2.2 m/min), depending on slab type
Cross Section Output	6 – 20 in (150 – 500 mm) slab thickness

**QUALITY.
SERVICE.
INNOVATION.
SPANCRETE.**



N16 W23415 STONERIDGE DRIVE
WAUKESHA, WI 53188
414.290.9000 | TOLL FREE: 855.900.SPAN
SPANCRETE.COM